



Tubo 100
Tubo 125
Tubo 150

Use

- For both input and extract ventilation

Application

- Residential premises
- Flats, cottages
- Offices
- Utility spaces
- Trade premises
- Restaurants
- Health care facilities
- Child care facilities

Features

- Duct mounting
- Easy maintenance
- Continuous operation
- Ball bearing motor
- 5 year warranty

Options

Timer

- Turn-off delay adjustable from 2 to 30 min



Bracket

- Fan with a mounting bracket for mounting to a horizontal or vertical surface.


Model	Turn-off delay timer
Tubo 100	
100 T	●
Tubo 125	
125 T	●
Tubo 150	
150 T	●



Tubo-U

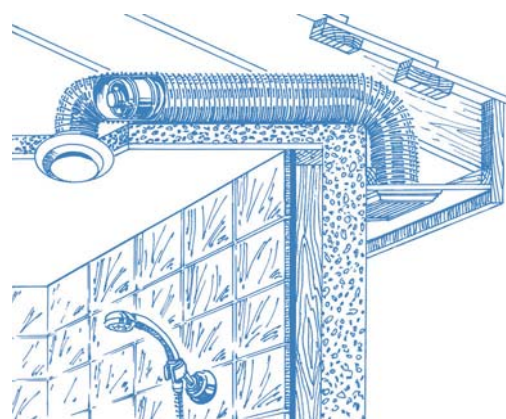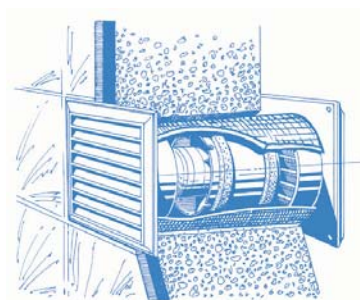


Overall and mounting dimensions

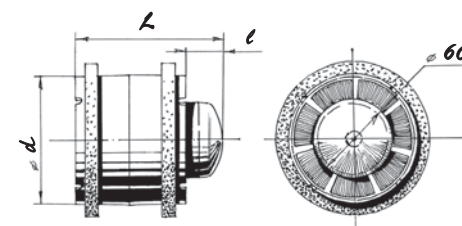

Model	Dimensions [mm]		
	d	L	l
Tubo 100	98	115	30
Tubo 125	123	115	30
Tubo 150	148	135	30

Technical data

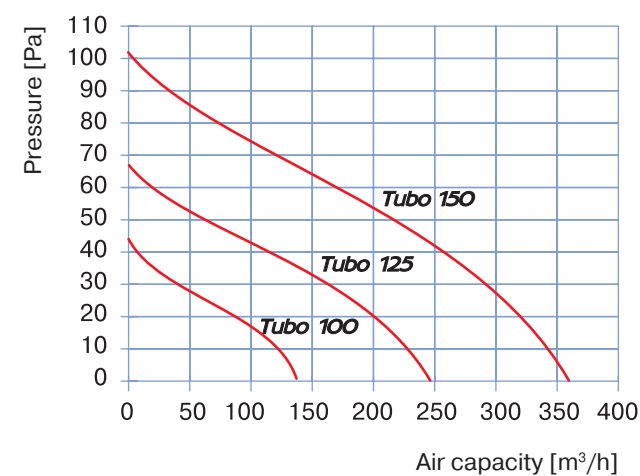

Parameters	Tubo 100	Tubo 125	Tubo 150
Voltage [V]	220-240	220-240	220-240
Power [W]	16	22	29
Air capacity [m³/h]	137	245	361
Sound pressure level at 3 m [dB(A)]	38	39	40
RPM [min ⁻¹]	2300	2400	2400



Packing

